

# AIR HYDRAULIC FOOT PUMP

**HYDROLUTION®**

INTEGRATED HYDRAULIC SOLUTIONS. ASIA FORCE

## AP1600 AIR DRIVEN HYDRAULIC PUMP

### FOR SINGLE & DOUBLE ACTING MODEL

1.6 LITRE TANK CAPACITY

MAX PRESSURE: 10,000psi/700Bar



AP1600D




AP1600S


## FEATURES

- Air-power hydraulic pump is designed for using with single-acting cylinders and tools.
- Rugged construction and most components are made of Aluminum alloy and built for long service life, easy operation and portability.
- Automatic overload relief valve setting as 10,000 psi protects components in hydraulic system and ensure work safety.

- New Inlet & Outlet design features low exhausting air volume, quiet effect and can be operated in all directions.
- Oil capacity can be modified according to your specific application.

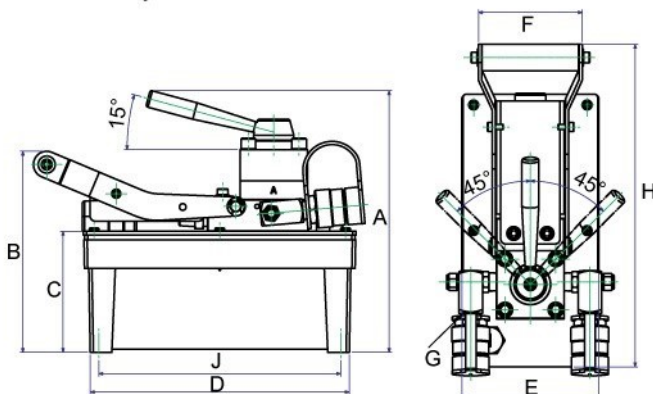

AP1600D

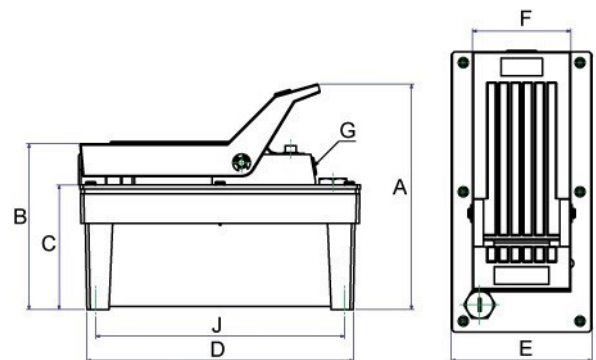

AP1600S

Model No.	Acting	Max. Pressure Output (psi)	Valve		Oil Del. ( c.c./min. @ )*			
			Type	Function	0(psi)	100(psi)	5000(psi)	10000(psi)
AP1600S	Single	10,000	---	Advance	1250	---	---	195
AP1600D	Double	10,000	3 Position / 4 Way	Advance/ Hold/ Retract	1250	---	---	195

Model No.	Input Air Pressure (kg)	Reservoir Capacity (c.c.)	Usable Oil Capacity (c.c.)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	J (mm)	Weight (kg)
AP1600S	7-10	1600	1300	207	152	114	244	129	90	3/8"-NPT	—	228	7.3
AP1600D	7-10	1600	1300	207	152	114	244	129	98	3/8"-NPT	304	228	9.3