

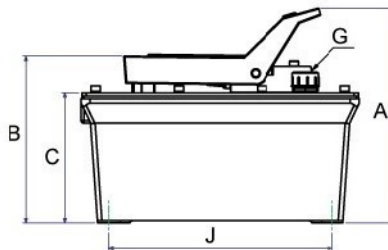
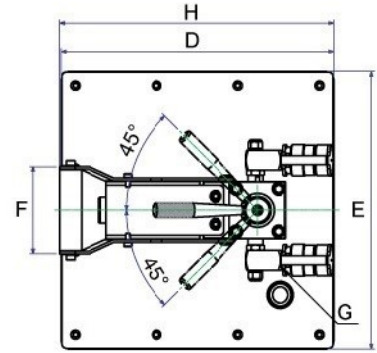
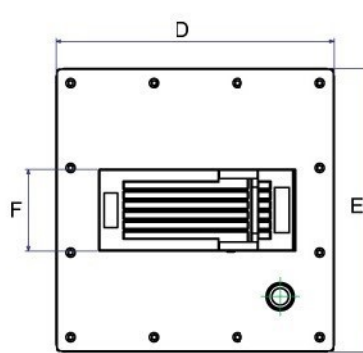
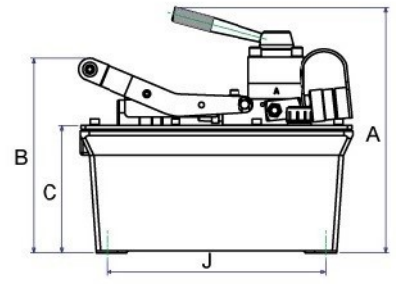
# AIR HYDRAULIC FOOT PUMP

**HYDROLUTION®**

INTEGRATED HYDRAULIC SOLUTIONS. ASIA FORCE

**AP8000S****AP8000 AIR DRIVEN HYDRAULIC PUMP****FOR SINGLE & DOUBLE ACTING MODEL****8 LITRE TANK CAPACITY****MAX PRESSURE: 10,000psi/700Bar****FEATURES**

- Air-power hydraulic pump is designed for using with single-acting cylinders and tools.
- Rugged construction and most components are made of Aluminum alloy and built for long service life, easy operation and portability.
- Automatic overload relief valve setting as 10,000 psi protects components in hydraulic system and ensure work safety.
- New Inlet & Outlet design features low exhausting air volume, quiet effect and can be operated in all directions.
- Oil capacity can be modified according to your specific application.

**AP8000S****AP8000D**

| Model No. | Acting | Max. Pressure Output (psi) | Valve              |                        | Oil Del. ( c.c./min. @ )* |          |           |            |
|-----------|--------|----------------------------|--------------------|------------------------|---------------------------|----------|-----------|------------|
|           |        |                            | Type               | Function               | 0(psi)                    | 100(psi) | 5000(psi) | 10000(psi) |
| AP8000S   | Single | 10,000                     | ---                | Advance                | 1250                      | ---      | ---       | 195        |
| AP8000D   | Double | 10,000                     | 3 Position / 4 Way | Advance/ Hold/ Retract | 1250                      | ---      | ---       | 195        |

| Model No. | Input Air Pressure (kg) | Reservoir Capacity (c.c.) | Usable Oil Capacity (c.c.) | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm)   | H (mm) | J (mm) | Weight (kg) |
|-----------|-------------------------|---------------------------|----------------------------|--------|--------|--------|--------|--------|--------|----------|--------|--------|-------------|
| AP8000S   | 7-10                    | 8000                      | 7200                       | 236    | 184    | 143    | 311.6  | 311.6  | 90     | 3/8"-NPT | —      | 251    | 19.1        |
| AP8000D   | 7-10                    | 8000                      | 7200                       | 276    | 218    | 143    | 311.6  | 311.6  | 98     | 3/8"-NPT | 313    | 251    | 21.5        |